




ASSEMBLE WITH BILT



*To assemble your grill, we recommend scanning and using the **BILT** App or following along with our assembly video.*

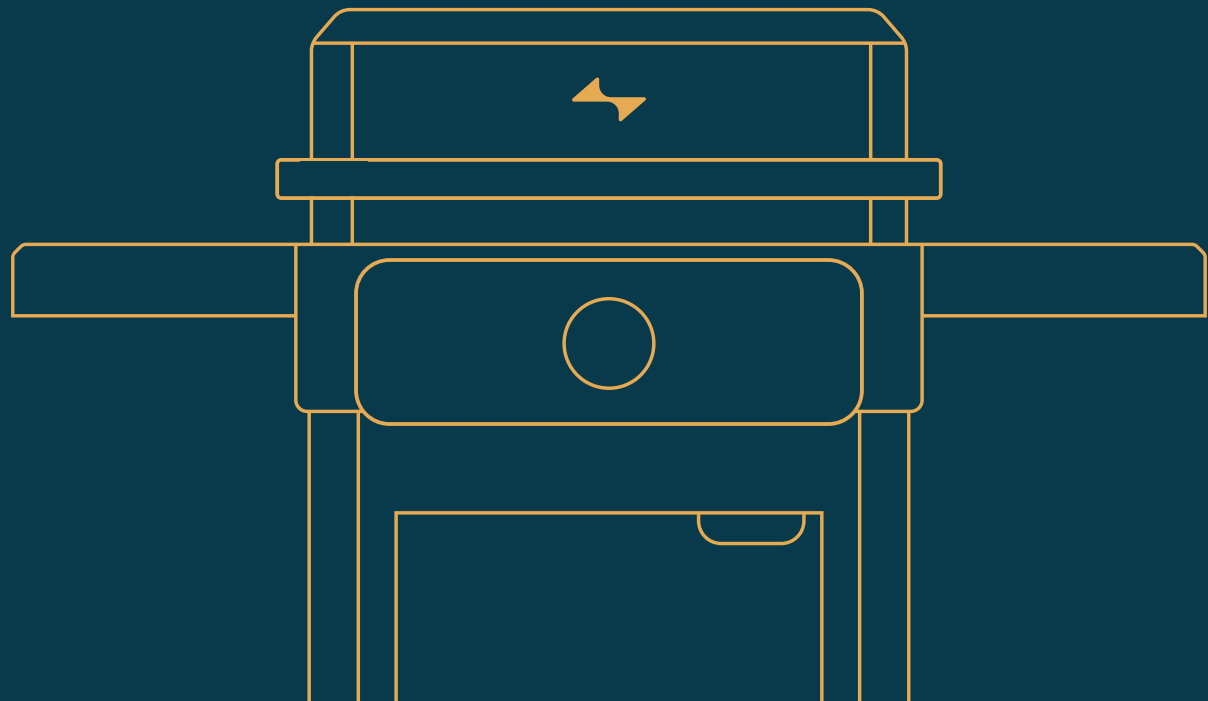

## GETTING STARTED




To get started with your grill download the Current App



### FOR BEST RESULTS

A 20 amp breaker and 20 amp GFCI outlet is recommended. For best performance and to prevent tripping, do not plug other appliances or devices into the same circuit as your Current.

## KNOW YOUR CONTROLS

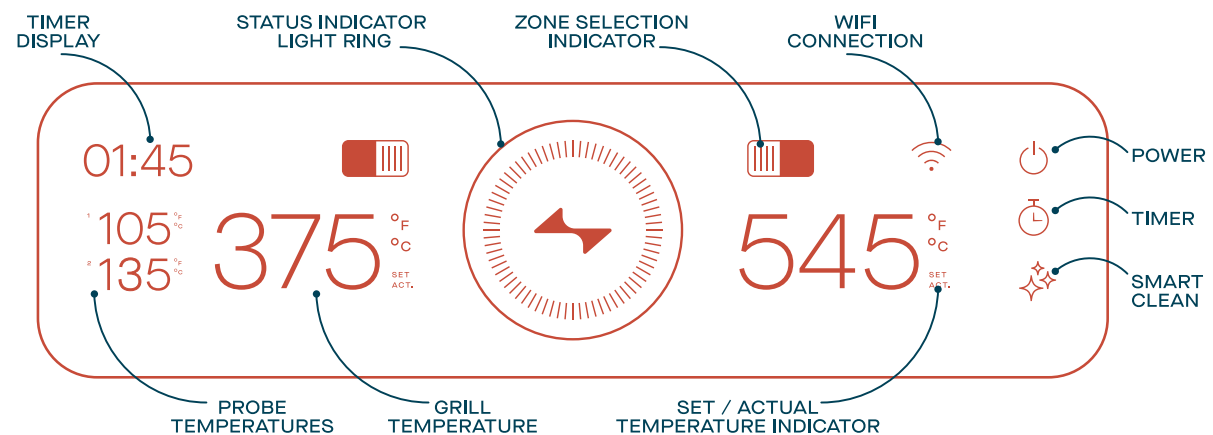

### Power Button

Turns unit on and off. Short press turns on, 2 second hold to turn off.

### Main Control Knob

Controls temperature and timer. Spin left or right to adjust, press in to confirm.

### Status Indicator Light Ring

Communicates grill status. See Indicator Guide on the next page.

### Zone Selection Indicator

Short press switches command of the Main Control Knob to that specific zone.

### Timer Icon

Short press turns on the timer section and switches command of the Main Control Knob

### Smart Clean

2 second press and hold initiates the Smart Clean program.

## CONTROL GUIDES

### Indicator Guide

- Solid Blue**  
Power on, waiting for set temperature to begin heating
- Flashing Red**  
Preheating to set temperature
- Solid Red**  
Set temperature reached, grill holding at set temperature
- Flashing Yellow**  
Smart Clean mode activated & operating
- Flashing Orange**  
Error. Please see website for error code guide.

### Temperature Range Guide

<b>SMOKING</b>	200°F-300°F
<b>LOW</b>	300°F-400°F
<b>MEDIUM</b>	400°F-500°F
<b>HIGH</b>	500°F+

### Caring for your Current



Scan the QR code to register your product, double your warranty and learn tips and tricks to maintain your Current grill.